

DIOTEC ELECTRONICS CORP
 18020 Hobart Blvd., Unit B
 Gardena, CA 90248 U.S.A
 Tel.: (310) 767-1052 Fax: (310) 767-7958

Looking For: Electric Vehicle Fast Switching
 Motor Control Diodes?


Data Sheet No. DISRT-7500-1A

75 AMP SOFT RECOVERY FAST SWITCHING TAB MOUNTED DIODES

FEATURES

- Ideally Suited For Electric Vehicle Motor Speed Control Applications
- True Soft Recovery Characteristic With No Ringing, Spikes, or Overshoot
- HIGH Frequency: 250 kHz
FAST Recovery: 100nS - 150nS
- Unmatched Performance - Minimal RFI/EMI, Reduced Power Losses, Extremely Cool Operation Increased Power Supply Efficiency
- VOID FREE Vacuum Die Soldering For Maximum Mechanical Strength And Heat Dissipation (Solder Voids: Typical < 2%, Max. < 10% of Die Area)

MECHANICAL SPECIFICATION

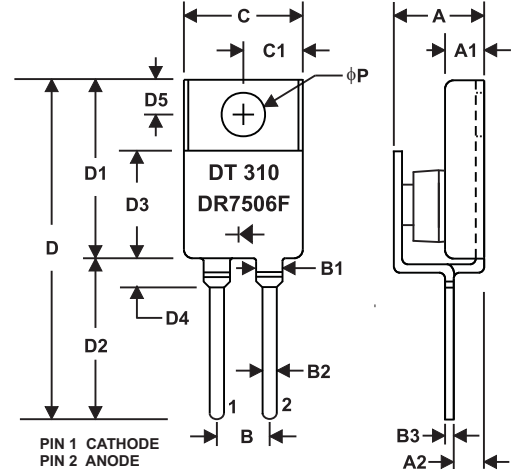

REVERSE POLARITY AVAILABLE
 BY ADDING AN "R" SUFFIX TO
 THE PART NUMBER (e.g., DR7506FR)

ALL DIMENSIONS IN INCHES

Sym	Min	Max
A	0.284	0.310
A1	0.120	0.135
A2	0.095	0.105
B	0.170	0.210
B1	0.080	0.090
B2	0.035	0.045
B3	0.023	0.029
C	0.400	0.410
C1	0.200	0.205
D		1.170
D1	0.600	0.615
D2	0.540	0.555
D3	0.355	0.370
D4		0.100
D5	0.100	0.120
φP	0.139	0.149

DIE SIZE: 0.250" DIAMETER
 ROUND DIE

RoHS COMPLIANT

MECHANICAL DATA

- Structure: Epoxy encapsulated diode body with metal tabs
- Finish: All external surfaces are corrosion resistant and readily solderable
- Soldering Temperature: 220 °C maximum, 3/8" from case for 10 seconds
- Mounting: Lead or chassis mounted, same configuration as TO-220AB
- Mounting Torque: 8 in-lbs Max.
- Weight: 0.13 Ounces (3.6 Grams), approximately

MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS					UNITS
		DR 7500F	DR 7501F	DR 7502F	DR 7504F	DR 7506F	
Series Number							
Maximum DC Blocking Voltage	V _{RM}	50	100	200	400	600	VOLTS
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	
Maximum Peak Recurrent Reverse Voltage	V _R RM	50	100	200	400	600	
Average Forward Rectified Current	I _O	75					AMPS
Peak Forward Surge Current (8.3mS single half sine wave superimposed on rated load)	I _F SM	800					
Maximum Forward Voltage at 75 Amps DC	V _{FM}	1.40 (Typical 1.35)					VOLTS
Maximum Average DC Reverse Current At Rated DC Blocking Voltage	I _{RM}	1.0 50					μA
Typical Thermal Resistance, Junction to Case	R _θ JC	0.8					°C/W
Maximum Reverse Recovery Time - Soft Recovery	T _{RR}	150 (Typ. 100)					nSec
Junction Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +175					°C